

## Industrial 20FE+8G Gigabit Managed PoE Plus Ethernet Switch JetNet 5728G



The JetNet 5728G series is a 19-inch Gigabit Layer 2+ Industrial PoE Plus switch and is specially designed for surveillance application that operate in extremely harsh environments. With up to 24-port PoE capability, the JetNet 5728G is designed exclusively for highly critical and large-scale PoE applications.

In addition, the JetNet 5728G provides the Korenix patented PoE technology, the Korenix cyber security+, the Korenix cyber redundancy+, and the isolated redundant power supplies to ensure the high secure and high availability for mission critical industrial applications.



PoE



IEEE1588 PTP



Wide Temp



EN50121-4



Cyber Security

### Features

- ▶ 20 100Base-TX and 4 100/1000Base-TX with 24/16 PoE Plus ports, 4 Gigabit SFP ports
- ▶ Advanced Cyber Security - DHCP Snooping, IP Source Guard, Dynamic ARP Inspection, L2/L3/L4 Access Control List (ACL)
- ▶ Advanced Cyber Redundancy - MSR, SuperChain, ITU-T G.8032 ERPS
- ▶ USB Firmware upgrade and configuration backup and restore
- ▶ EEE Energy saving
- ▶ Friendly Device and Auto Network Topology utility
- ▶ Isolated redundant power inputs with VDC power or 110/220 VAC power
- ▶ Embedded 300W AC power
- ▶ Compliance with EN50121-4
- ▶ -40 to 75°C operating temperature, fanless



# Specification

Technology	
Standard	IEEE 802.3u 10Base-T Ethernet IEEE 802.3u 100Base-TX Fast Ethernet IEEE 802.3ab 1000Base-T Gigabit Ethernet copper IEEE 802.3z Gigabit Ethernet Fiber IEEE 802.3x Flow Control and back-pressure IEEE 802.1AB Link Layer Discovery Protocol (LLDP) IEEE 802.1p Class of Service (CoS) IEEE 802.1Q VLAN and GVRP IEEE 802.1Q Double Tag VLAN (QinQ) IEEE 802.1D Rapid Spanning Tree (RSTP) IEEE 802.1S Multiple Spanning Tree Protocol (MSTP) IEEE 802.3ad Link Aggregation Protocol (LACP) IEEE 802.1x Port based Network Access Protocol ITU-T G.8032 ERPS IEEE 1588 PTPv1/v2
Performance	
Switch Technology	Store and Forward Technology with 20Gbps Non-Blocking Switching Fabric
CPU Performance	400Mhz ARM9 CPU with 10 Seconds Hardware Based Watchdog Timer
System Memory	256Mbytes RAM, 32Mbytes Flash ROM
Transfer packet Size	64Bytes ~ 9728Bytes (include double Tag VLAN)
MAC address Table	16K
Packet Buffer	1.5Mbytes shared memory
Transfer performance	14,880pps for Ethernet, 148,800pps for Fast Ethernet, 1488,100pps for Gigabit Ethernet
Management	
Configuration, monitoring interface	<ul style="list-style-type: none"> <li>In-Band Management: Telnet with SSH, Web-Browser with SSL, IPv6, SNMP V1/V2c/V3 with SNMP Trap (4 Trap Stations), RMON Group 1,2,3,9, Modbus/TCP, EtherNet/IP</li> <li>Out-Band Management: Local RJ-45/RS-232 connector with Cisco like command</li> <li>USB Firmware upgrade and configuration backup and restore</li> </ul>
System Manage Secure	<ul style="list-style-type: none"> <li>Telnet/Local Console support command like interface with Cisco like commands, and offers 4 management sessions; the system supports SSL for HTTP security, SSH for Telnet security</li> <li>Supports Manage Station with IP Secure function, up to 4 Manage Stations</li> <li>Management Device Login Switch System by Remote RADIUS account/password, key for RADIUS Server authentication</li> </ul>
SNMP MIB	MIB II, Bridge MIB, Ethernet Like MIB, VLAN MIB, IGMP MIB, Private MIB
Management Utility	Management utility with IEEE 802.1AB link Layer Protocol for Device finding and Link Topology Discovery
Network Time Protocol	NTP protocol with daylight saving and localize time sync function
IEEE 1588 PTP	IEEE 1588 Precision Time Protocol v1/v2
E-mail Warning	4 receipt E-mail accounts with mail server authentication
System log	Local or remote log server with authentication


Network Performance	
Port Configuration	Port Link Speed, Link Mode, Link Status and Port Enable/Disable
Port Trunk/ Link Aggregation	IEEE 802.3ad port aggregation and static port trunk, Trunk member up to 8 ports, maximum 8 trunk groups
VLAN	IEEE 802.1Q tag VLAN with 4K VLAN/GVRP entries 3 VLAN modes - Trunk, Hybrid and Link access
Private VLAN	Direct Client ports in isolated /community VLAN to promiscuous port in primary VLAN
IEEE 802.1 QinQ	Double Tag for Private VLAN Access
Class of Service	IEEE 802.1p class of service, 8 priority queues/port
Traffic Prioritize	Supports 8 physical queues with weighted fair queuing (WRR) or Strict Priority Schemer, which follows IEEE 802.1p CoS tag and IPv4 Type of Service/Differ information to prioritize the traffic of your industrial network
IGMP Snooping	IGMP Snooping v1/v2/v3 for multicast filtering and IGMP Query mode, also support unknown multicast forwarding policies- Drop, Flooding and Forward to route port
Rate Control	Ingress/Egress filtering for Broadcast, Multicast, Unknown DA or All packets
Port Mirroring	On-line traffic monitoring on multiple selected target ports
DHCP	DHCP Client/Server with IP & MAC address binding, DHCP Relay Agent function and DHCP Server with Static port based IP assigned function
Advanced Cyber Security *See Note-1	Port security, IEEE 802.1x, DHCP Snooping, IP Source Guard, Dynamic ARP Inspection, Denial of Service (DoS) protection, L2/L3/L4 Access Control List (ACL), TACACS+
Industrial Protocol	Modbus/TCP, EtherNet/IP
Network Redundancy	
Redundancy	Multiple Super Ring™ Technology, Includes Rapid Super Ring, Rapid Dual Homing, TrunkRing™, MultiRing™, SuperChain™
Dual Homing	Multiple uplink paths to one or multiple upper Switch, up to 256 Groups RDH Peer protection
TrunkRing™	Integrate port aggregate function in ring path to get higher throughput ring architecture
MultiRing™	Couple or multiple up to 14 Rapid Super Rings in one device, supports up to 10 100M rings and 4 Gigabit rings
SuperChain™	Chain technology with flexible and scalability, compatibility, and easy configurable. The ring includes 2 types of node Switch - Border Switch and Member Switch
Rapid Spanning Tree	IEEE 802.1D-2004 Rapid Spanning Tree Protocol. Compatible with Legacy Spanning Tree and IEEE 802.1w
Multiple Spanning Tree	IEEE 802.1s Multiple Spanning Tree, each MSTP instance can include one or more VLANs, and also supports multiple RSTP deployed in a VLAN or multiple VLANs
ITU-T G.8032 ERPS *See Note-2	Support ITU-T G.8032 ERPS V1 single ring topology
PoE Features	
PoE Wiring	1, 2, 3, 6
PoE Specification	IEEE802.3af, IEEE802.3at
PoE Technology	PoE Priority Control, PD keep alive checking, PoE Scheduling
Embedded AC power	300W
Total Power Budget	180W@AC(75°C), 270W@AC(-40°C-60°C); 650W@DC(-40°C-75°C) (24P model, Max. 30W/port)
Power Requirement	
AC Power input	110/220 VAC(90-264VAC)
DC Power input	2x44-57VDC(IEEE 802.3af), 2x50-57VDC(IEEE 802.3at)
Power Consumption	Max. 25Watts (DC mode without PoE loading) Max. 36Watts (AC mode 110V without PoE loading) Max. 73Watts (AC mode 240V without PoE loading)

Mechanical	
Installation	19", 1U Rackmount
Enclosure Material	Steel Metal
Dimension	44mm(H) x 431mm (W) x 375mm (D)
Weight	7.4 kg with package
Ingress Protection	IP40
Environmental	
Operating Temperature	-40°C-75°C
Operating Humidity	10%-95%, Non-Condensing
Storage Temperature	-40°C-85°C
Hi-Pot Insulation	AC 1.5KV for Ethernet Interface to Power, Power to Case
MTBF(hrs)	>202,000
Approvals	
Rail Traffic	EN50121-4
Safety	UL60950-1
EMC	EMI: IEC/EN61000-3-2, EN61000-3-3, EN55022 FCC Class A, CE Radiation, Conduction
	EMS: IEC/EN55024 IEC61000-4-2, IEC61000-4-3, IEC61000-4-4, IEC61000-4-5, IEC61000-4-6, IEC61000-4-8 IEC61000-4-11
Vibration	IEC 60068-2-6, IEC 60068-2-36
Shock	IEC 60068-2-27
Free Fall	IEC 60068-2-32
Warranty	5 Years

\* Note-1: Advanced Cyber Security - DHCP Snooping, IP Source Guard, Dynamic ARP Inspection, TACACS+ (By Request)

\* Note-2: ITU-T G.8032 ERPS - ERPS v2 multiple rings with ladder topology (By Request)

## Dimension (Unit = mm)

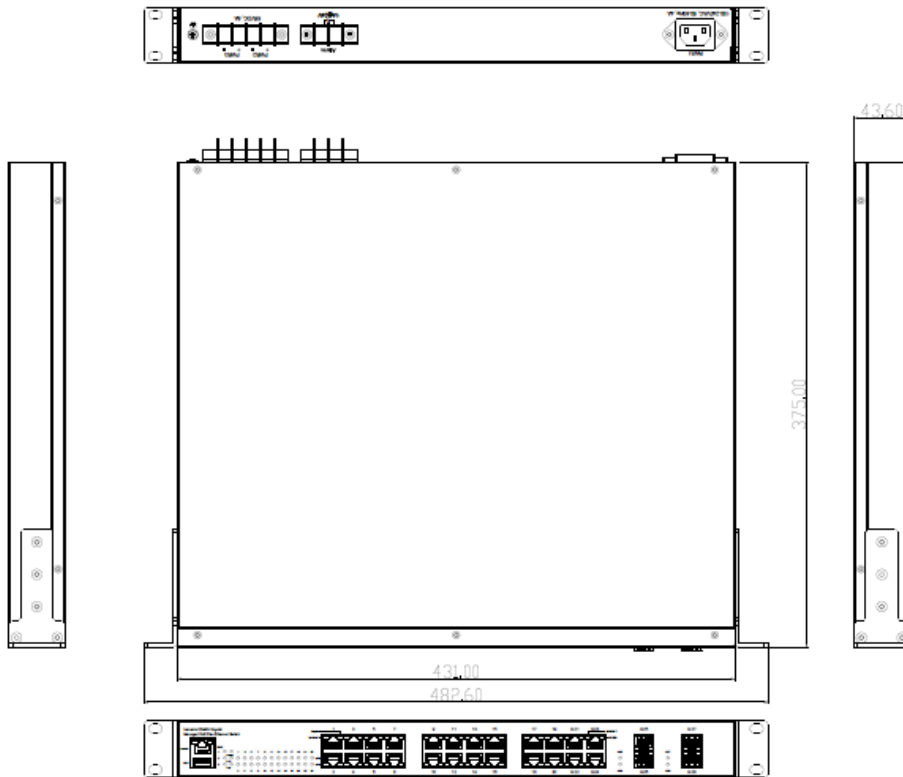

## Ordering Information

JetNet 5728G-24P-AC-2DC

20 100Base-TX with 20 PoE Plus ports, 4 100/1000Base-TX with 4 PoE Plus ports, 4 Gigabit SFP ports, Ind. Gigabit Managed PoE Plus Ethernet Switch, -40~75°C, AC and dual DC power

JetNet 5728G-24P-AC

20 100Base-TX with 20 PoE Plus ports, 4 100/1000Base-TX with 4 PoE Plus ports, 4 Gigabit SFP ports, Ind. Gigabit Managed PoE Plus Ethernet Switch, -40~75°C, AC power

JetNet 5728G-16P-AC-2DC

20 100Base-TX with 16 PoE Plus ports, 4 100/1000Base-TX ports, 4 Gigabit SFP ports, Ind. Gigabit Managed PoE Plus Ethernet Switch, -40~75°C, AC and dual DC power

JetNet 5728G-16P-AC

20 100Base-TX with 16 PoE Plus ports, 4 100/1000Base-TX ports, 4 Gigabit SFP ports, Ind. Gigabit Managed PoE Plus Ethernet Switch, -40~75°C, AC power